



Order No. 3.66055
Support Frame for Suspension Bridge
Order No. 3.66645
Support Frame for Rope Bridge
 Installation height 1.50 m

Safety distance 
 Device dimensions 
 Functional distance 

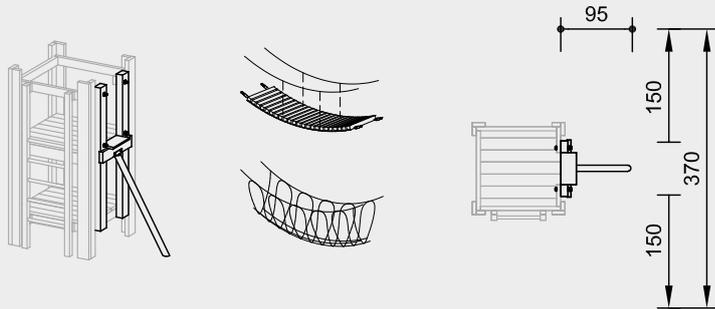

Order No. 3.66057
Support Frame for Suspension Bridge
Order No. 3.66647
Support Frame for Rope Bridge
 Installation height 1.00 m

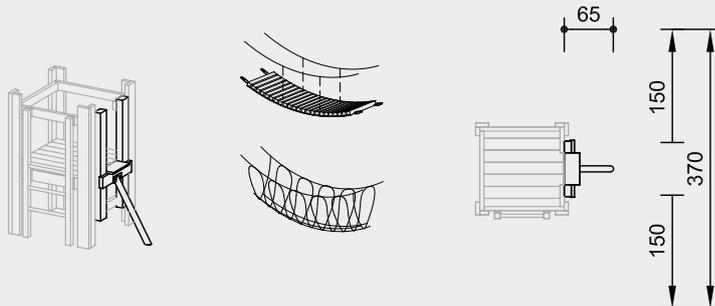

Scale 1:100

Safety check according to DIN EN 1176

Components

1 Frame each

Installation information

Surfacing requirements corresponding to a fall height determined by installation height (please refer to price list for more detailed information)

Foundations
 1 item 60 x 60 x 40 cm
 Excavation depth 60 cm

Attention:
Exact measurements may vary;
for all installation dimensions refer to current assembly instructions.
 Technical changes reserved.

Technical information

All Support Frames made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Plywood

Plywood made of mountain larch, three-layer (3 cm) or five-layer (4 cm). High dimensional stability, waterproof, glued according to DIN EN 13353:2011



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



For more detailed explanation of the quality characteristics see price list.

Metal braces hot-dip galvanised, Ø 83 mm





3.66055 / 3.66645





3.66057 / 3.66647

Order No. 3.66290
Support Frame for Chain Path
 Installation height 1.50 / 1.00 m

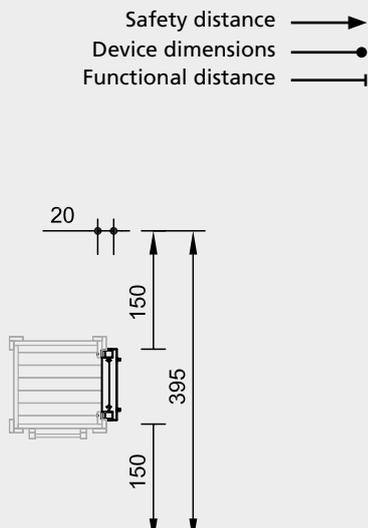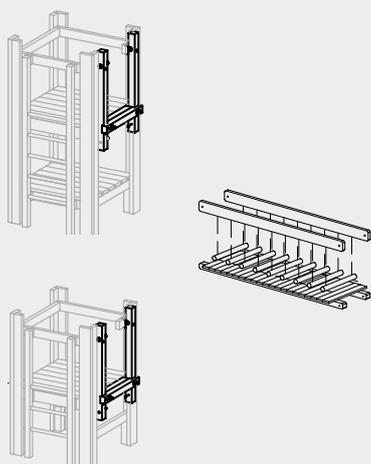

Order No. 3.66360 / 3.66367
Support Frame for Bridge
 Installation height 1.50 / 1.00 m

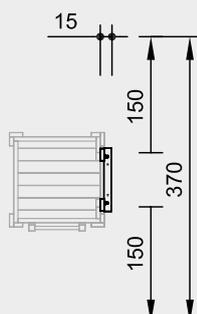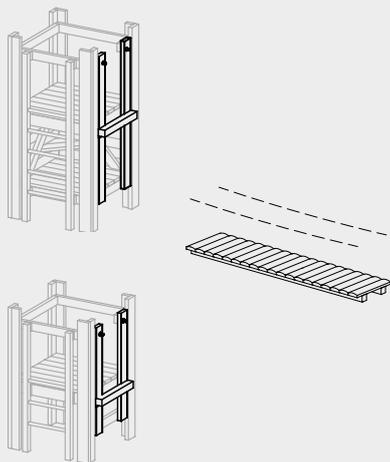

Scale 1:100

Safety check according to DIN EN 1176

Technical information

All Support Frames made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



For more detailed explanation of the quality characteristics see price list.

Components

1 Frame each

Installation information

Surfacing requirements corresponding to a fall height determined by installation height (please refer to price list for more detailed information)

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions.

Technical changes reserved.



3.66290



3.66360



3.66367