Play value

Swinging and rocking are typical movements in the childhood. Children are looking for possibilities to experience this swinging movement. Lying in the Cradle Nest is even more pleasant when a friendly co-player sets the swing into motion from outside. It is special fun if there are several "chicks" in the nest. Our special version with a cross beam made of steel contributes to the stability of our construction and gives a strong expression.







Fundamental characteristics

- High-quality design
- Incentive for playing: repeat known activity
- Movement: swinging, jumping off, rocking

Recommended for

- School children
- Supervised play areas, such as schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar


Barrier-free

- With a carer

Big Triple Swing special





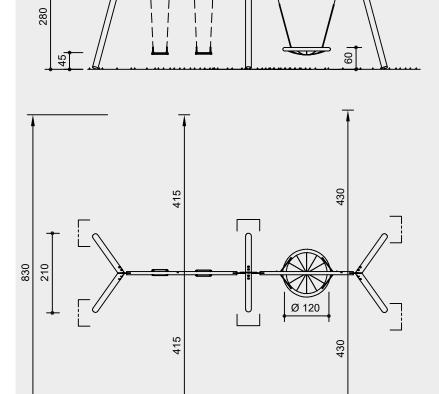

290

790

850

Safety check according to DIN EN 1176

Components

- 1 Swing frame with steel feet and cross beam made of steel
- Rubber seats with Chains 2
- Stork nest suspended on ropes 1 and chains

Dimensions

(small deviations possible)

Height
Vertical clearance
Width
Depth
Weight



6.18020

Installation information

250

Surfacing requirements corresponding to a fall height of \leq 1.50 m (please refer to price list for more detailed information)

Foundations 6 items 60 x 70 x 60 cm Excavation depth 80 cm

Attention:

2.80 m

2.60 m

7.90 m

2.10 m

420 kg

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved. Equipment also available as Small Triple Swing special (Order No. 6.14820) with rubber seat, cradle seat and swallow's nest.

Technical information

Equipment made of mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced

Swing seat

Ergonomically shaped swing seat made of rubber with soft shock absorbing edge. Durable due to strong profiled steel insert

Swing joint

Drop-forged, hot-dip galvanised swing joint with sintered bush and integrated swivel

Universal joint

Drop-forged, hot-dip galvanised universal joint, consists of two sintered bushes, for free swinging in any direction

Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt

Interlocking

Interlocking connection, with milled metal rings or serrated disc dowels, to reinforce the bolt connection under high loads transverse to the grain direction of the wood

Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary

Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel

Cross beam made of steel

Swing cross beam made of hot-dip galvanized steel. Optimized swing geometry with rigid corner connections, thus allowing for smaller foundations and easier foundation covering

Chains

Scale 1:100

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten

Stainless Chains

Chains made of steel with high corrosion resistance. Short-linked, without eyelets on the connecting parts, easily replaceable and simple shortening

For more detailed explanation of the quality characteristics see price list.

Stork nest Ø 120 cm, standard colour rope ring (PPM): olive green, standard colour net seat and suspension rope Ø 16 mm (polyester): black

Suspended on Ø 0.7 cm stainless steel chains























