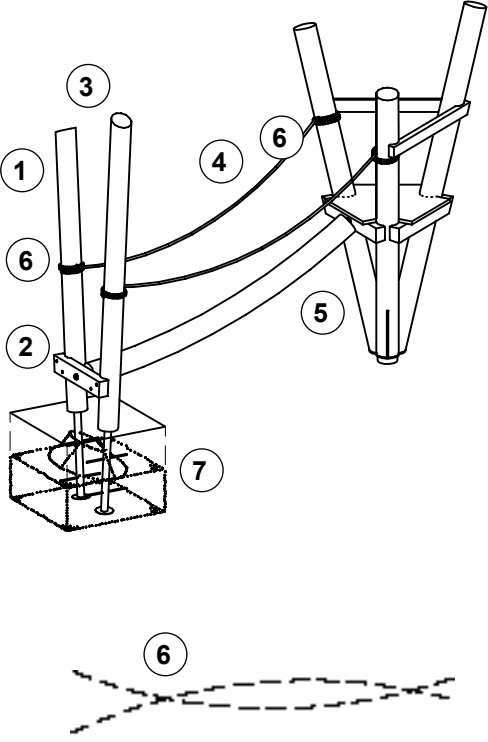


Instructions for wear checks of play equipment	The equipment must be checked for correct operation and safety, especially the points listed below:	Proof of maintenance	
Playground..... Date of installation Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year. Intervals for maintenance work and checks generally depend on - location - usage - frequency of use - possible vandalism For more details see also our general instructions for maintenance of playgrounds! End Frame with Ascent with PP-Rope Order No. 3.69860 	Wooden parts 1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks. ☐ 2. Check that all bolts and screws are tight and retighten if necessary. ☐ 3. Recommendation: apply paraffin wax to the upper end grain areas once a year, please refer to Order No. 0.90100, 1 litre. ☐ Ropes and rope connections 4. Check ropes for wear and tear, if the steel reinforcement is damaged, it is imperative it be replaced. ☐ 5. Check that ropes are securely connected, retighten screws/bolts if necessary. ☐ 6. Check that the clamps holding the ropes are connected firmly. ☐ Important! It should not be possible to form loops with the handrail ropes. Structural stability 7. In order to check steel feet for corrosion, uncover the foundations once a year. ☐		Special notes, e.g. for repairs
	Repair not carried out, it is still possible to play on equipment	☐	
	Repair not carried out, equipment is taken out of action	☐	
	All work carried out, everything is in order	☐	
Maintenance carried out by: Date			